

SECURITHERM thermostatic basin mixer

Ref. H9600

Single hole sequential thermostatic mixer H.95mm L.120mm







DESCRIPTION

SECURITHERM thermostatic basin mixer - Ref. H9600







Deck-mounted SECURITHERM thermostatic basin mixer. Thermostatic sequential mixer: opens and closes with cold water. No risk of cross flow between hot and cold water. Mixer has no non-return valves on the inlets. Anti-scalding failsafe: immediate shut-off if cold or hot water supply fails. Securitouch thermal insulation prevents burns. Single hole mixer with curved spout H. 95mm L. 120mm fitted with a hygienic flow straightener. Scale-resistant sequential thermostatic cartridge for single lever control of flow rate and temperature. Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C. Thermal or chemical shocks are possible. Body and spout with smooth interiors and low water volume. Flow rate limited to 5 lpm at 3 bar. No manual contact thanks to Hygiene control lever L. 146mm. No pop-up waste. Supplied with F3/8" PEX flexibles with chrome-plated brass stopcocks. Fixing reinforced via 2 stainless steel rods. Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics. Mixer suitable for people with reduced mobility. Mixer with 30-year warranty. Also available with copper tails.


ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Securitouch: thermal insulation prevents burns

TECHNICAL CHARACTERISTICS

SECURITHERM thermostatic basin mixer - Ref. H9600

| | |
|---------------------|---|
| Connector | F3/8" |
| Technology | SECURITHERM Securitouch sequential mixer |
| Drop height | 95mm |
| Spout length | 120mm |
| Flow rate | 5 lpm at 3 bar |
| Temperature limiter | Yes |
| Finish | Chrome-plated brass |
| Norms |      |
| Warranty |  |

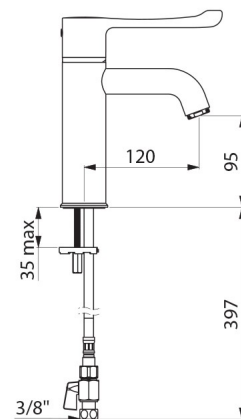

Repairability

