

Shower kit with thermostatic mixer

Ref. H9739SHYG

Securitouch dual control thermostatic mixer

DESCRIPTION

Shower kit with thermostatic mixer - Ref. H9739SHYG

SECURITHERM dual control thermostatic shower kit with auto-draining device:

- Shower mixer with scale-resistant, thermostatic cartridge:
- Mixer with anti-scalding failsafe: shuts off automatically if cold supply fails.
- Prevents cold showers: shuts off automatically if hot water supply fails.
- Scale-resistant thermostatic cartridge for temperature adjustment.
- ¼-turn ceramic head for flow rate adjustment.
- Temperature adjusts from 25 - 40°C with maximum temperature pre-set at 38°C.

Thermal shocks are possible without removing the control knob or shutting off the cold water supply.

Flow rate limited to 9 lpm at 3 bar.

Chrome-plated brass body with CLASSIC controls.

M1/2" shower outlet.


Filters and non-return valves integrated on the F3/4" inlets.

Mixer with offset standard wall connectors, M1/2" M3/4".

- Shower head (ref. 813) with chrome-plated wall-mounted tilting support (ref. 845).
 - Auto-draining device FM1/2" for installation between the flexible hose and the shower head, automatically drains the shower head and flexible hose (reduces bacterial development) (ref. 880).
- Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Mixer suitable for people with reduced mobility.
Shower mixer with 30-year warranty.

TECHNICAL CHARACTERISTICS

Shower kit with thermostatic mixer - Ref. H9739SHYG

Connector	M1/2"
Technology	SECURITHERM thermostatic mixer
Depth	73mm
Length	281mm
Width	280mm
Flow rate	9 lpm
Temperature limiter	38°C
Finish	Chrome-plated brass
Norms	ACS 



ADVANTAGES



SECURITHERM: Optimum anti-scalding safety




Pre-set maximum temperature limiter



Automatically drains shower head and flexible hose



Thermostatic: total temperature stability

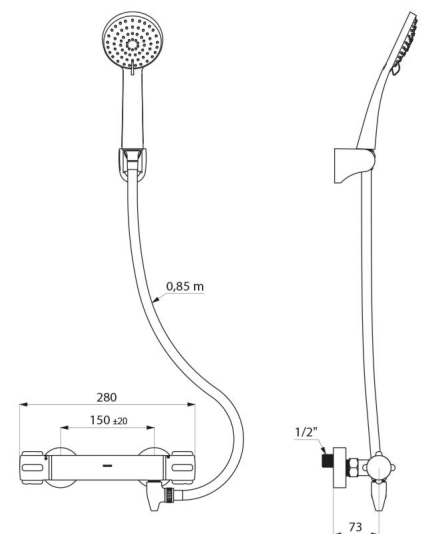

Warranty

30
YEAR
WARRANTY

Repairability

50
YEARS
REPAIRABILITY
