Twin hole pillar-mounted mixer - 100 lpm

Ref. 5603

On pillar mounts

DESCRIPTION

Twin hole pillar-mounted mixer - 100 lpm - Ref. 5603

Twin hole mixer, M3/4" with 150mm centres on pillar mounts for plunge sinks.
Swivelling, tubular spout Ø 22mm H. 380mm L. 300mm.
Star-shaped, brass flow straightener.
Water-free, guided valve heads with reinforced mechanisms.
Shock-resistant ergonomic ball levers.
Flow rate 100 lpm at 3 bar suitable for plunge sinks.
Full flow rate within the first 90°.
Spout with smooth interior.
One-piece body and spout in chrome-plated brass.
Reinforced fixings and recessed inlets.
30-year warranty.

ADVANTAGES

- Flow rate 100 lpm at 3 bar
- Shock-resistant control levers for intensive use
- One-piece body and brass spout for commercial use
- Spout with smooth interior

TECHNICAL CHARACTERISTICS

Twin hole pillar-mounted mixer - 100 lpm - Ref. 5603
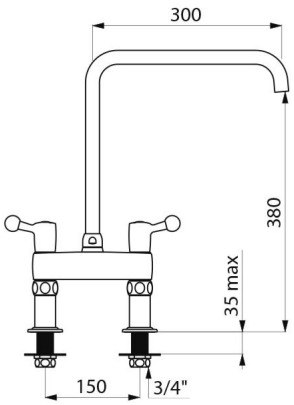
Connector	M3/4"
Height	445mm
Drop height	380mm
Spout length	300mm
Flow rate	100 lpm
Finish	Chrome-plated brass
Norms	ACS
Warranty	30 YEAR WARRANTY
Repairability	50 YEARS REPAIRABILITY