

SECURITHERM shower panel

Ref. 792504

Electronic mains supply thermostatic



DESCRIPTION

SECURITHERM shower panel - Ref. 792504

Electronic thermostatic shower panel:
Large stainless steel panel for wall-mounted, exposed installation.

Top inlet via in-line stopcocks M $\frac{1}{2}$ ".

SECURITHERM thermostatic mixer.

Adjustable temperature control from cold water up to 38°C with 1st limiter set at 38°C and 2nd limiter set at 41°C.

Anti-scalding failsafe: automatic shut-off if cold water fails.

Anti-cold showers function: automatic shut-off if hot water fails.

Thermal shocks are possible.

Mains supply 230/6V.

Shower starts when electronic push-button is pressed.

Shuts off voluntarily or automatically after ~60 seconds.

Duty flush (~60 seconds every 24 hours after the last use).

Flow rate 6 lpm at 3 bar, can be adjusted, rain-effect spray.

Chrome-plated, tamperproof, scale-resistant ROUND shower head with automatic flow rate regulation.

Integrated soap dish.

Concealed fixings.

Filters and non-return valves.

Suitable for people with reduced mobility.

30-year warranty.

TECHNICAL CHARACTERISTICS

SECURITHERM shower panel - Ref. 792504

Supply	230/6V mains supply
Connector	M $\frac{1}{2}$ "
Technology	Electronic
Height	1220mm
Depth	100mm
Width	250mm
Flow rate	6 lpm
Temperature limiter	Thermostatic
Finish	Stainless steel
Norms	ACS  

ADVANTAGES



Exceptional water savings:
80%




Anti-bacterial proliferation
duty flush



Thermostatic temperature
regulation



Instant shut-off if cold water
fails

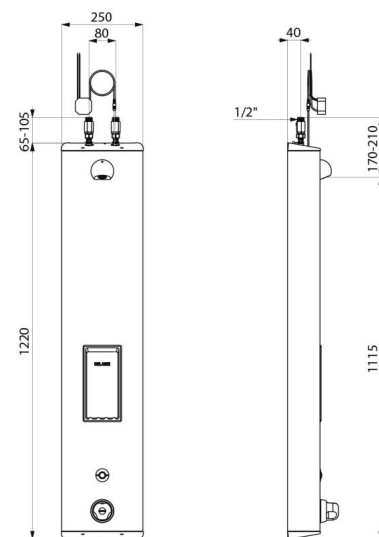

Warranty

