


TEMPOMIX 3 time flow shower mixer

Ref. 794400

Time flow single control



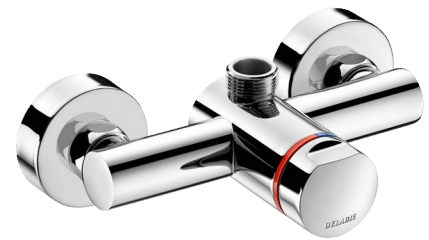



DESCRIPTION

TEMPOMIX 3 time flow shower mixer - Ref. 794400

Exposed time flow shower mixer:
 TEMPOMIX 3 single control mixer, top outlet M $\frac{3}{4}$ ".
 For wall-mounted, exposed installation.
 Temperature control and operation via the push-button.
 Maximum temperature limiter (can be adjusted by the installer).
 Soft-touch operation.
 Time flow ~30 seconds.
 Flow rate 6 lpm at 3 bar, can be adjusted from 6 - 12 lpm.
 Chrome-plated solid brass.
 Integrated filters and non-return valves.
 Chrome-plated metal push-button.
 M $\frac{1}{2}$ " offset connectors for 130 - 170mm centres.
 Suitable for people with reduced mobility.
 30-year warranty.

TECHNICAL CHARACTERISTICS

TEMPOMIX 3 time flow shower mixer - Ref. 794400

| | |
|------------|--|
| Connector | M $\frac{1}{2}$ " |
| Technology | Time flow |
| Width | 150mm |
| Flow rate | 9 lpm |
| Norms |    ACS |
| Warranty |  |

ADVANTAGES



Soft-touch operation



Time flow system tested to over 500,000 operations

