


SECURITHERM Securitouch thermostatic shower mixer

Ref. H9769S

Thermostatic mixer with no non-return valves

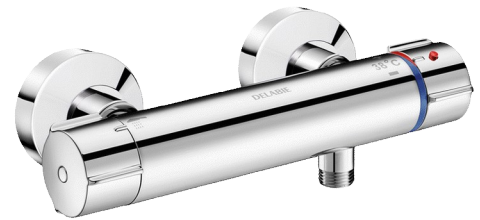

DESCRIPTION

SECURITHERM Securitouch thermostatic shower mixer - Ref. H9769S

SECURITHERM dual control thermostatic shower mixer. Thermostatic mixer with no non-return valves on the inlets (reduced bacterial proliferation).

No risk of cross flow between hot and cold water.

Mixer with anti-scalding failsafe: shuts off automatically if cold supply fails.

Prevents cold showers: shuts off automatically if hot water supply fails.

Securitouch thermal insulation prevents burns.

Scale-resistant thermostatic cartridge for temperature adjustment.

¼-turn ceramic head for flow rate adjustment.

Temperature control up to 43°C.

Double temperature limiter: 1st limiter set at 41°C, 2nd limiter set at 43°C.

Thermal shocks are possible without removing the control knob or shutting off the cold water supply.

Flow rate limited to 9 lpm at 3 bar.

Ergonomic controls.

M½" shower outlet.

F¾" inlets with integrated filters.

Mixer supplied with offset standard wall connectors M½" M¾".





Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Mixer suitable for people with reduced mobility.

Shower mixer with 30-year warranty.

TECHNICAL CHARACTERISTICS

SECURITHERM Securitouch thermostatic shower mixer - Ref. H9769S

| | |
|---------------------|---|
| Connector | M1/2" |
| Technology | SECURITHERM Securitouch thermostatic mixer, no-non-return valves |
| Depth | 84 mm |
| Length | 260mm |
| Flow rate | 9 lpm at 3 bar |
| Temperature limiter | Yes |
| Finish | Chrome-plated brass |
| Norms | ACS    |
| Warranty |  |

ADVANTAGES



SECURITHERM: Anti-scalding safety



Maximum hygiene: no non-return valves



Securitouch thermal insulation prevents burns



Thermostatic: total temperature stability

