

SECURITHERM thermostatic basin mixer

Ref. H960015

Single hole thermostatic sequential mixer, H. 95mm L. 120mm

DESCRIPTION

SECURITHERM thermostatic basin mixer - Ref. H960015

Deck-mounted SECURITHERM thermostatic basin mixer.
 Thermostatic sequential mixer: opens and closes with cold water.
 No risk of cross flow between hot and cold water.
 No non-return valves on the inlets.
 Anti-scalding failsafe: shut-offs automatically if cold or hot water supply fails.
 Securitouch thermal insulation prevents burns.
 Single hole mixer with curved spout H. 95mm L. 120mm, equipped with a hygienic flow straightener with no impurity retention and will withstand thermal shocks.
 Scale-resistant sequential thermostatic cartridge for single lever control of the flow rate and temperature.
 Temperature control from cold water up to 40°C with temperature limiter set at 40°C.
 Thermal or chemical shocks are possible.
 Body and spout with smooth interiors and low water volume.
 Flow rate limited to 5 lpm at 3 bar.
 No manual contact thanks to Hygiene control lever L. 146mm.
 No pop-up waste.
 PEX flexibles F3/8" supplied with stopcocks in chrome-plated brass, filters and Ø 15mm compression fittings.
 Fixing reinforced by 2 stainless steel rods.
 Mixer ideal for healthcare facilities, nursing homes, hospitals and clinics.
 Mixer Suitable for people with reduced mobility.
 Mixer with 30-year warranty.
 Also available with copper tails.





TECHNICAL CHARACTERISTICS


SECURITHERM thermostatic basin mixer - Ref. H960015

Connector	M1/2" Ø 15mm
Technology	SECURITHERM Securitouch sequential mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	 



ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Securitouch: thermal insulation prevents burns

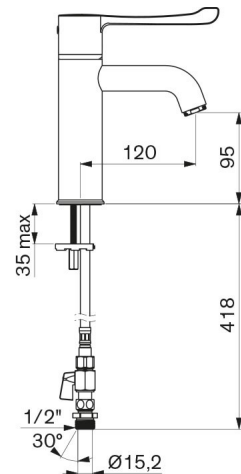

Warranty

30
YEAR
WARRANTY

Repairability

50
YEARS
REPAIRABILITY
