

SECURITHERM EP BIOSAFE pressure-balancing basin mixer

Ref. 26216MINIEP

Single hole mechanical mixer with no spout H. 50mm L. 80mm


DESCRIPTION

SECURITHERM EP BIOSAFE pressure-balancing basin mixer - Ref. 26216MINIEP

Deck-mounted mechanical basin mixer with pressure-balancing. Single hole mechanical mixer H. 50mm L. 80mm. No spout: BIOSAFE hygienic outlet integrated into the body. Ø 35mm ceramic cartridge with pressure-balancing and pre-set maximum temperature limiter. Anti-scalding safety: HW flow rate is reduced if CW supply fails (and vice versa). Stable temperature regardless of pressure and flow rate variations in the system. Securitouch thermal insulation prevents burns. Thermal shocks are possible without removing the control lever or shutting off the cold water supply. Mixer body with smooth interior and very low water volume (reduces bacterial development). Flow rate limited to 4 lpm at 3 bar. Solid control lever. Mixer with copper tails and Ø 15mm stopcocks. Fixing reinforced by two stainless steel rods. Mechanical mixer with SECURITHERM pressure-balancing ideal for healthcare facilities, retirement and care homes, hospitals and clinics. Single hole mixer suitable for people with reduced mobility. Mixer with 30-year warranty. Also available with PEX flexibles.

TECHNICAL CHARACTERISTICS

SECURITHERM EP BIOSAFE pressure-balancing basin mixer - Ref. 26216MINIEP

Connector	1/2"
Technology	SECURITHERM EP BIOSAFE mechanical mixer
Drop height	50mm
Spout length	80mm
Flow rate	4 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	



ADVANTAGES



HW flow rate reduced if CW fails




Maximum hygiene: mixer with no spout



Thermal shocks are possible without removing lever



Hygiene: body with very low water volume

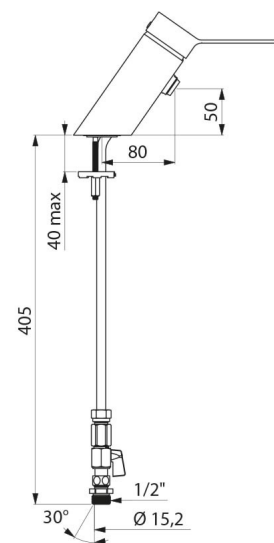

Warranty

30
YEARS
WARRANTY

Repairability

50
YEARS
REPAIRABILITY
