# SPORTING 2 SECURITHERM electronic shower panel

Ref. 714910

Mains, thermostatic, rain-effect spray

## DESCRIPTION

**SPORTING 2 SECURITHERM electronic shower panel - Ref. 714910**

SPORTING 2 SECURITHERM, thermostatic electronic shower panel:
Recessed inlets.
Anodised aluminium and chrome-plated satin finish panel.
Mains supply 230/6V.
Infrared presence detection. Shower starts when hand is moved towards the sensor (detection distance ~4cm).
Shuts off voluntarily or automatically after ~60 seconds.
Duty flush (~60 seconds every 24 hours after the last use).
Flow rate 6 lpm at 3 bar, comfortable rain-effect spray.
Tamperproof, fixed shower head with automatic flow rate regulation.
Accessible filters and non-return valves.
Integrated stopcocks.
M½" connections (compact nanny joint, kit 1/2).
Electronic shower panel suitable for people with reduced mobility.
30-year warranty.
SECURITHERM technology:
Thermostatic shower mixer directly integrated in the head of the shower panel.
Temperature set by the installer.
Stable temperature, pre-set at 38°C.
Anti-scalding failsafe: automatic shut-off if the cold water fails.
Prevents cold showers: automatic shut-off if the hot water fails.
Order with nanny joint reference 714012.

## ADVANTAGES

- Exceptional water savings: 80%
- Anti-bacterial proliferation duty flush
- Immediate shut-off if cold water fails
- Sleek shapes, concealed fixings

## TECHNICAL CHARACTERISTICS

**SPORTING 2 SECURITHERM electronic shower panel - Ref. 714910**

| | |
|---|---|
| Supply | Mains supply 230/6V |
| Connector | M½" |
| Technology | Electronic |
| Height | 1020mm |
| Depth | 21mm |
| Width | 70mm |
| Flow rate | 6 lpm |
| Finish | Aluminium |
| Norms | ACS WRAS |

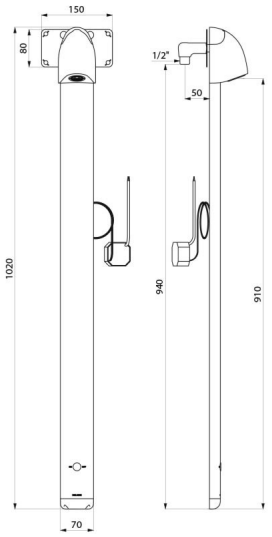

| | |
|---|---|
| Warranty | 30 YEAR WARRANTY |

© DELABIE