

## SPORTING 2 SECURITHERM electronic shower panel

Ref. 714916

Battery-operated, thermostatic, scale-resistant nozzle



### DESCRIPTION

**SPORTING 2 SECURITHERM electronic shower panel - Ref. 714916**





SPORTING 2 SECURITHERM, thermostatic electronic shower panel, kit 2/2:  
 Recessed inlets.  
 Anodised aluminium and chrome-plated satin finish panel.  
 Slimline structure with concealed fixings  
 Battery-operated with CR123 6V Lithium batteries.  
 Infrared presence detection. Shower starts when hand is moved towards the sensor (detection distance ~4cm).  
 Shuts off voluntarily or automatically after ~60 seconds.  
 Duty flush (~60 seconds every 24 hours after the last use).  
 Flow rate 6 lpm at 3 bar.  
 Tamperproof, scale-resistant fixed shower head with automatic flow rate regulation.  
 Accessible filters and non-return valves.  
 Integrated stopcocks.  
 M½" recessed connections.  
 Electronic shower panel suitable for people with reduced mobility.  
 30-year warranty.  
 SECURITHERM technology:  
 Thermostatic mixer directly integrated in the head of the shower panel.  
 Temperature set by the installer.  
 Stable temperature, pre-set at 38°C.  
 Anti-scalding failsafe: automatic shut-off if the cold water fails.  
 Anti-cold showers function: automatic shut-off if the hot water fails.  
 Order with support bracket 714612.


### TECHNICAL CHARACTERISTICS

**SPORTING 2 SECURITHERM electronic shower panel - Ref. 714916**

Supply	CR123 6V Lithium batteries
Connector	M½"
Technology	Electronic
Height	1020mm
Depth	21mm
Width	70mm
Flow rate	6 lpm
Finish	Aluminium
Norms	ACS WRAS

### ADVANTAGES

-  80% water savings
-  Anti-bacterial proliferation duty flush
-  Immediate shut-off if cold water fails
-  Sleek shapes, concealed fixings

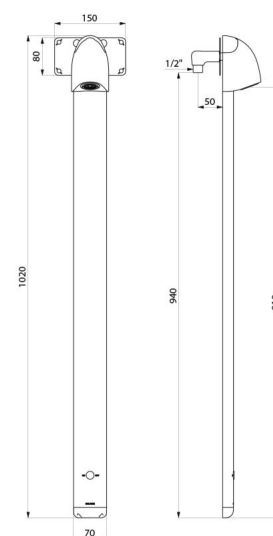

---

Warranty

