

SPORTING 2 SECURITHERM electronic shower panel

Ref. 714916

Battery-operated, thermostatic, rain-effect spray

DESCRIPTION

SPORTING 2 SECURITHERM electronic shower panel - Ref. 714916

SPORTING 2 SECURITHERM, thermostatic electronic shower panel, kit 2/2:
 Recessed inlets.
 Anodised aluminium and chrome-plated satin finish panel.
 Slimline structure with concealed fixings
 Battery-operated with CR123 6V Lithium batteries.
 Infrared presence detection. Shower starts when hand is moved towards the sensor (detection distance ~4cm).
 Shuts off voluntarily or automatically after ~60 seconds.
 Duty flush (~60 seconds every 24 hours after the last use).
 Flow rate 6 lpm at 3 bar.
 Tamperproof, rain-effect fixed shower head with automatic flow rate regulation.
 Accessible filters and non-return valves.
 Integrated stopcocks.
 M $\frac{1}{2}$ " connections (Compact nanny joint, kit 1/2).
 Electronic shower panel suitable for people with reduced mobility.
 30-year warranty.
 SECURITHERM technology:
 Thermostatic mixer directly integrated in the head of the shower panel.
 Temperature set by the installer.
 Stable temperature, pre-set at 38°C.
 Anti-scalding failsafe: automatic shut-off if the cold water fails.
 Anti-cold showers function: automatic shut-off if the hot water fails.
 Order with support bracket 714612.





TECHNICAL CHARACTERISTICS


SPORTING 2 SECURITHERM electronic shower panel - Ref. 714916

| | |
|------------|---|
| Supply | CR123 6V Lithium batteries |
| Connector | M $\frac{1}{2}$ " |
| Technology | Electronic |
| Height | 1020mm |
| Depth | 21mm |
| Width | 70mm |
| Flow rate | 6 lpm |
| Finish | Aluminium |
| Norms |     |



ADVANTAGES

-  Exceptional water savings: 80%
-  Anti-bacterial proliferation duty flush
-  Immediate shut-off if cold water fails
-  Sleek shapes, concealed fixings

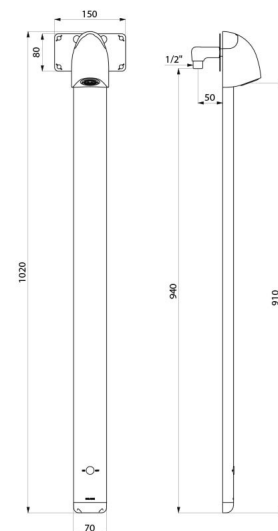

Warranty

