

# SECURITHERM thermostatic sequential sink mixer

Ref. H962015

Single hole thermostatic sequential mixer H. 160mm L. 140mm

## DESCRIPTION

**SECURITHERM thermostatic sequential sink mixer - Ref. H962015**

Deck-mounted SECURITHERM thermostatic sink mixer.  
 Thermostatic sequential mixer: opens and closes with cold water.  
 Single hole mixer with curved spout H. 160mm L. 140mm with hygienic flow straightener for no impurity retention and thermal shock-resistant.  
 Anti-scalding failsafe: automatic shut-off if cold or hot water supply fails.  
 Securitouch thermal insulation prevents burns.  
 No risk of cross flow between hot and cold water.  
 No non-return valves on the inlets.  
 Scale-resistant sequential thermostatic cartridge for single lever control of flow rate and temperature.  
 Temperature can be adjusted from cold water up to 40°C with temperature limiter set at 40°C.  
 Thermal or chemical shocks are possible.  
 Body and spout with smooth interiors and low water volume.  
 Flow rate regulated at 9 lpm.  
 No manual contact thanks to Hygiene control lever L. 146mm.  
 No pop-up waste.  
 Supplied with stainless steel F3/8" PEX flexibles with chrome-plated brass stopcocks, filters and Ø 15mm conical inlets.  
 Reinforced fixing via 2 stainless steel rods.  
 Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.  
 Suitable for people with reduced mobility.  
 30-year warranty.  
 Also available with copper tails.





## TECHNICAL CHARACTERISTICS


**SECURITHERM thermostatic sequential sink mixer - Ref. H962015**

Supply	1/2", Ø 15mm
Technology	Thermostatic sequential mixer
Drop height	160mm
Spout length	140mm
Flow rate	9 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Warranty	



## ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Thermostatic: total temperature stability

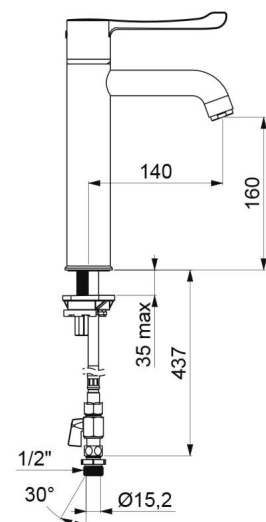

---

Repairability

