


Control plate for TEMPOMATIC 4 for urinals

Ref. 430036

Recessed electronic battery-operated valve - For urinals

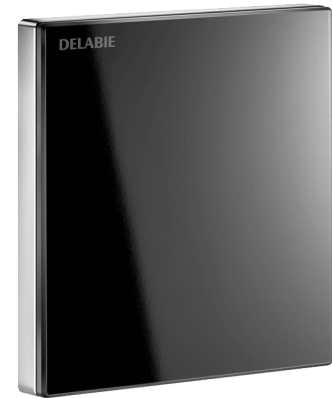

DESCRIPTION

Control plate for TEMPOMATIC 4 for urinals - Ref. 430036

TEMPOMATIC 4 electronic valve F½", kit 2/2.
 Battery-operated with CR 123 Lithium 6V batteries.
 Solenoid valve enables opening and closing of water.
 Black control plate 145 x 145mm in shock-resistant vitro-ceramic glass with integrated electronics.
 Shock-resistant infrared presence detection sensor.
 Detection delay is 10 seconds.
 3 programmes (rinsing volume can be adjusted according to urinal type).
 High frequency mode (exclusive to DELABIE):
 - Short rinse after each user.
 - Additional rinse after the period of increased frequency of use.
 Hygienic duty flush every 24 hours (can be adjusted to 12 hours or OFF) after last use: prevents vacuums.
 Flow rate pre-set at 0.15 L/sec at 3 bar, can be adjusted.
 TEMPOMATIC 4 F½" valve compatible with sea water, rain water and grey water.
 Installation in waterproof housing with waterproof collar, transformer, filter and stopcock.
 Suitable for people with reduced mobility.
 30-year warranty.
 Order with frame system references 543006 for urinals Ø 35mm, 543006D for urinals with flexible ½" or with recessed housing 430PBOX.

ADVANTAGES



Total hygiene: no manual contact



3 rinsing programmes and high-frequency mode










Hygienic duty flush



123 Lithium 6V batteries

TECHNICAL CHARACTERISTICS

Control plate for TEMPOMATIC 4 for urinals - Ref. 430036

| | |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supply | 6V batteries |
| Technology | Electronic |
| Length | 145mm |
| Width | 145mm |
| Finish | Black wall plate in shock-resistant vitro-ceramic glass |
| Norms |       |
| Warranty |  |

