

SECURITHERM BIOCLIP sequential thermostatic sink mixer

Ref. H962515

Removable sequential thermostatic mixer H. 160mm L. 140mm

DESCRIPTION

SECURITHERM BIOCLIP sequential thermostatic sink mixer - Ref. H962515

Deck-mounted thermostatic SECURITHERM sink mixer. Sequential thermostatic mixer: opens and closes with cold water. No risk of cross flow between the hot and cold water. No non-return valves on the inlets. BIOCLIP: mixer is easy to remove for cleaning and disinfection. Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails. Securitouch thermal insulation prevents burns. Single hole mixer with curved spout H. 160mm L. 140mm fitted with a hygienic flow straightener with no impurity retention and thermal shock-resistant. Scale-resistant sequential thermostatic cartridge for single control of flow rate and temperature. Temperature adjusts from cold water up to 40°C with temperature limiter set at 40°C. Thermal and chemical shocks are possible. Body and spout with smooth interiors and low water volume. Flow rate 9 lpm at 3 bar. No manual contact thanks to Hygiene control lever L. 146mm. No pop-up waste. Supplied with PEX flexibles F3/8" with chrome-plated brass stopcocks, filters and conical inlets Ø 15mm. Fixing reinforced by 2 stainless steel rods. Thermostatic mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics. Sequential mixer suitable for people with reduced mobility. 30-year warranty. Also available with copper tails.





TECHNICAL CHARACTERISTICS


SECURITHERM BIOCLIP sequential thermostatic sink mixer - Ref. H962515

| | |
|---------------------|---|
| Supply | 1/2", Ø 15mm |
| Technology | Removable sequential thermostatic mixer |
| Drop height | 160mm |
| Spout length | 140mm |
| Flow rate | 9 lpm |
| Temperature limiter | Yes |
| Finish | Chrome-plated brass |



ADVANTAGES

-  Maximum hygiene: mixer with no non-return valves
-  Hygiene: can be removed for internal cleaning
-  SECURITHERM: optimal anti-scalding safety
-  Sequential: opens and closes with cold water

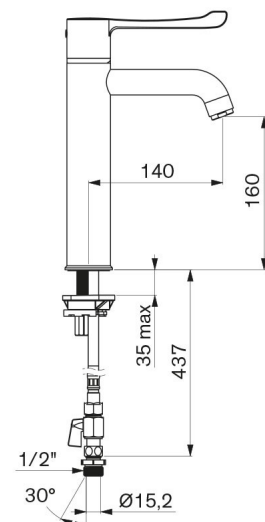

Warranty

30
YEAR
WARRANTY

Repairability

50
YEARS
REPAIRABILITY
