SECURITHERM EP pressure-balancing basin mixer

Ref. 27216LEP

Single hole mechanical mixer H. 95mm L. 120mm

DESCRIPTION

SECURITHERM EP pressure-balancing basin mixer - Ref. 27216LEP

Deck-mounted mechanical basin mixer with pressure-balancing.
Single hole mixer with curved spout H. 95mm L. 120mm fitted with a hygienic BIOSAFE outlet.
Ø 35mm ceramic cartridge with pressure-balancing and pre-set maximum temperature limiter.
Anti-scalding safety: HW flow rate is reduced if CW supply fails (and vice versa).
Stable temperature regardless of pressure and flow rate variations in the system.
Body and spout with smooth interiors (reduced bacterial development).
Thermal shocks are easy to undertake without removing the control lever or shutting off the water supply.
Flow rate limited to 5 lpm.
Hygiene control lever L. 150mm.
With no pop-up waste.
Copper tails supplied with chrome-plated brass stopcocks.
Fixing reinforced by two stainless steel rods.
SECURITHERM pressure-balancing mechanical mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.
Single hole mixer suitable for people with reduced mobility.
Mixer with 30-year warranty.
Also available with PEX flexibles.

ADVANTAGES

- HW flow rate reduced if CW supply fails
- EP: reduces temperature variations
- Hygiene: smooth interior reduces bacteria
- Thermal shocks are possible without removing lever

TECHNICAL CHARACTERISTICS

SECURITHERM EP pressure-balancing basin mixer - Ref. 27216LEP
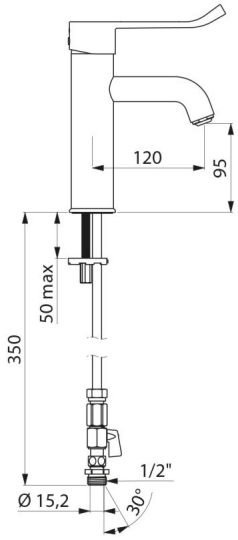
Connector	1/2"
Technology	SECURITHERM EP mechanical mixer
Height	95mm
Spout length	120mm
Flow rate	5 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	WRAS
Warranty	30 YEAR WARRANTY
Repairability	50 YEARS REPAIRABILITY