

# Shower kit with thermostatic mixer

Ref. H9739SKIT

Dual control thermostatic mixer

2025 UK public price excluding VAT: £418.78

## DESCRIPTION

Shower kit with thermostatic mixer - Ref. H9739SKIT

SECURITHERM dual control thermostatic shower kit:

- Shower mixer with scale-resistant, thermostatic cartridge: Mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails.

Prevents cold showers: shuts off automatically if hot water supply fails.

Scale-resistant thermostatic cartridge controls the temperature.

1/4-turn ceramic head for flow rate adjustment.

Temperature control from 25 - 40°C with temperature limiter set at 38°C.

Thermal shocks are possible without removing the control knob or shutting off the cold water supply.

Flow rate regulated at 9 lpm.

Chrome-plated body and CLASSIC controls.

M1/2" shower outlet.

F3/4" inlets with integrated filters and non-return valves.

Mixer with 2 offset standard wall connectors, M1/2" M3/4".

- Sliding shower head holder (ref. 813) on a chrome-plated riser rail (ref. 821) with soap dish and flexible shower hose (ref. 836T1).

- Shower hose retaining collar (ref. 830).

Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Thermostatic mixer suitable for people with reduced mobility.

Shower kit with 30-year warranty.

## TECHNICAL CHARACTERISTICS

Shower kit with thermostatic mixer - Ref. H9739SKIT

|                     |                                                                                         |
|---------------------|-----------------------------------------------------------------------------------------|
| Connector           | M1/2"                                                                                   |
| Technology          | SECURITHERM thermostatic mixer                                                          |
| Depth               | 73mm                                                                                    |
| Length              | 281mm                                                                                   |
| Width               | 280mm                                                                                   |
| Flow rate           | 9 lpm                                                                                   |
| Temperature limiter | Yes                                                                                     |
| Finish              | Chrome-plated brass                                                                     |
| Norms               | ACS  |
| Warranty            |      |



## ADVANTAGES



SECURITHERM: Optimum anti-scalding safety




Pre-set maximum temperature limiter



Thermostatic: total temperature stability



Ergonomic: controls are easy to grip

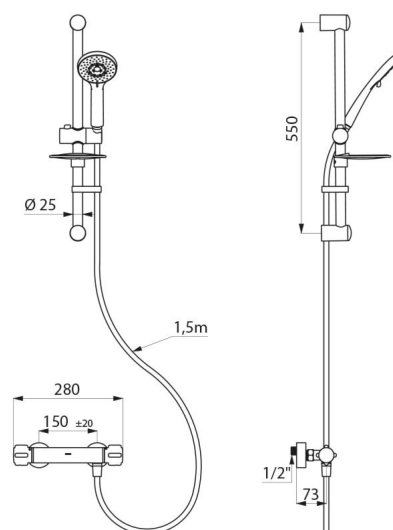

Repairability

