

# SECURITHERM BIOCLIP

## thermostatic basin mixer

Ref. H960515

Single hole sequential thermostatic mixer H. 95mm L. 120mm

2024 UK public price excluding VAT: £440.94



### DESCRIPTION

**SECURITHERM BIOCLIP thermostatic basin mixer - Ref. H960515**

Deck-mounted SECURITHERM thermostatic basin mixer. Sequential thermostatic mixer: opens and closes with cold water. No risk of cross flow between the hot and cold water. No non-return valve. BIOCLIP: mixer can be easily removed for cleaning and disinfection. Anti-scalding failsafe: shuts off automatically if cold or hot water supply fails. Securitouch thermal insulation prevents burns. Single hole mixer with curved spout, H. 95mm L. 120mm, fitted with a hygienic flow straightener, no build-up of impurities and withstands thermal shocks. Scale-resistant sequential thermostatic cartridge for single control adjustment of flow rate and temperature. Temperature adjusts from cold water up to 40°C with maximum temperature limiter set at 40°C. Thermal and chemical shocks are possible. Body and spout with smooth interiors and low water volume. Flow rate limited to 5 lpm at 3 bar. No manual contact thanks to Hygiene control lever L. 146mm. No pop-up waste. Supplied with F3/8" PEX flexibles with chrome-plated brass stopcocks, filters and Ø 15mm conical connectors. Fixing reinforced via 2 stainless steel rods. Mixer ideal for healthcare facilities, retirement and care homes , hospitals and clinics. Mixer suitable for people with reduced mobility. 30-year warranty. Also available with copper tails.

### TECHNICAL CHARACTERISTICS

**SECURITHERM BIOCLIP thermostatic basin mixer - Ref. H960515**

Connector	M1/2", Ø 15mm
Technology	SECURITHERM BIOCLIP sequential thermostatic mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm at 3 bar
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	 



### ADVANTAGES



Maximum hygiene: mixer with no non-return valves




Hygiene: can be removed for internal cleaning



SECURITHERM: optimal anti-scalding safety



Sequential: opens/closes with cold water

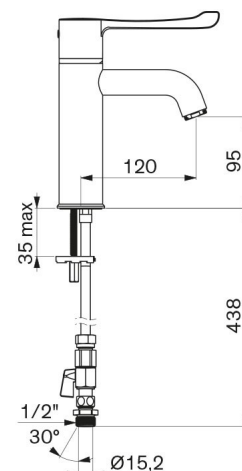

---

Warranty

**30**  
YEAR  
WARRANTY

---

Repairability

**50**  
YEARS  
REPAIRABILITY

---