

# SECURITHERM thermostatic basin mixer

Ref. H960015

Single hole thermostatic sequential mixer, H. 95mm L. 120mm

2024 UK public price excluding VAT: **£389.36**



## DESCRIPTION

**SECURITHERM thermostatic basin mixer - Ref. H960015**





Deck-mounted SECURITHERM thermostatic basin mixer. Thermostatic sequential mixer: opens and closes with cold water. No risk of cross flow between hot and cold water. No non-return valves on the inlets. Anti-scalding failsafe: shut-offs automatically if cold or hot water supply fails. Securitouch thermal insulation prevents burns. Single hole mixer with curved spout H. 95mm L. 120mm, equipped with a hygienic flow straightener with no impurity retention and will withstand thermal shocks. Scale-resistant sequential thermostatic cartridge for single lever control of the flow rate and temperature. Temperature control from cold water up to 40°C with temperature limiter set at 40°C. Thermal or chemical shocks are possible. Body and spout with smooth interiors and low water volume. Flow rate limited to 5 lpm at 3 bar. No manual contact thanks to Hygiene control lever L. 146mm. No pop-up waste. PEX flexibles F3/8" supplied with stopcocks in chrome-plated brass, filters and Ø 15mm compression fittings. Fixing reinforced by 2 stainless steel rods. Mixer ideal for healthcare facilities, nursing homes, hospitals and clinics. Mixer Suitable for people with reduced mobility. Mixer with 30-year warranty. Also available with copper tails.


## TECHNICAL CHARACTERISTICS

**SECURITHERM thermostatic basin mixer - Ref. H960015**

Connector	M1/2" Ø 15mm
Technology	SECURITHERM Securitouch sequential mixer
Drop height	95mm
Spout length	120mm
Flow rate	5 lpm
Temperature limiter	Yes
Finish	Chrome-plated brass
Norms	 

## ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimal anti-scalding safety
-  Securitouch: thermal insulation prevents burns

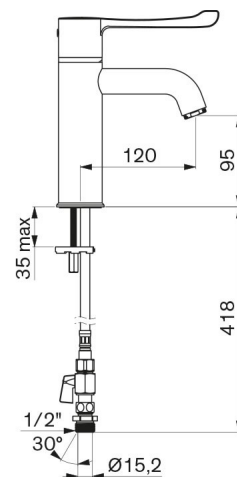

---

Warranty

**30**  
YEAR  
WARRANTY

---

Repairability

**50**  
YEARS  
REPAIRABILITY

---