

SPORTING 2 SECURITHERM electronic shower panel

Ref. 714910

Mains, thermostatic, scale-resistant nozzle

2024 UK public price excluding VAT: £438.04

DESCRIPTION

SPORTING 2 SECURITHERM electronic shower panel - Ref. 714910

SPORTING 2 SECURITHERM, thermostatic electronic shower panel:
Recessed inlets.

Anodised aluminium and chrome-plated satin finish panel.

Mains supply 230/6V.

Infrared presence detection. Shower starts when hand is moved towards the sensor (detection distance ~4cm).

Shuts off voluntarily or automatically after ~60 seconds.

Duty flush (~60 seconds every 24 hours after the last use).

Flow rate 6 lpm at 3 bar.

Tamperproof, scale-resistant fixed shower head with automatic flow rate regulation.

Accessible filters and non-return valves.

Integrated stopcocks.

M $\frac{1}{2}$ " recessed connections.

Electronic shower panel suitable for people with reduced mobility.

30-year warranty.

SECURITHERM technology:

Thermostatic shower mixer directly integrated in the head of the shower panel.

Temperature set by the installer.

Stable temperature, pre-set at 38°C.

Anti-scalding failsafe: automatic shut-off if the cold water fails.

Anti-cold showers function: automatic shut-off if the hot water fails.

Order with support bracket reference 714012.

TECHNICAL CHARACTERISTICS

SPORTING 2 SECURITHERM electronic shower panel - Ref. 714910

| | |
|------------|---|
| Supply | Mains supply 230/6V |
| Connector | M $\frac{1}{2}$ " |
| Technology | Electronic |
| Height | 1020mm |
| Depth | 21mm |
| Width | 70mm |
| Flow rate | 6 lpm |
| Finish | Aluminium |
| Norms | ACS    |



ADVANTAGES



80% water savings




Anti-bacterial proliferation duty flush



Immediate shut-off if cold water fails



Sleek shapes, concealed fixings

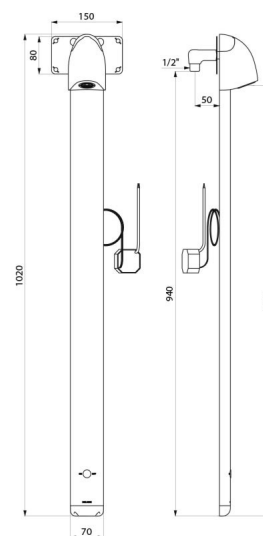

Warranty

