

SECURITHERM sequential thermostatic shower mixer



Ref. 9630

Thermostatique mixer with no non-return valves, bottom outlet





2024 UK public price excluding VAT: £359.12

DESCRIPTION

SECURITHERM sequential thermostatic shower mixer - Ref. 9630








SECURITHERM sequential thermostatic shower mixer. Sequential thermostatic mixer: opens and closes with cold water. Mixer with no non-return valves on the inlets (reduces bacterial proliferation). No risk of cross flow between the hot and cold water. Sequential mixer with anti-scalding failsafe: shuts off automatically if cold water supply fails. Prevents cold showers: shuts off automatically if hot water supply fails. Securitouch thermal insulation prevents burns. Scale-resistant sequential thermostatic cartridge adjusts the flow rate and the temperature. Temperature adjusts from cold water up to 39°C with temperature limiter set at 39°C. Thermal shocks are possible. Body with smooth interior and low water volume (reduces bacterial proliferation). Flow rate regulated at 9 l/min. Chrome-plated brass body and Hygiene lever L. 100mm. M1/2" bottom outlet. Mixer with no wall connectors with filters integrated in the inlets, F3/4". Mixer ideal for healthcare facilities, retirement and care homes, hospitals and clinics. Sequential mixer suitable for people with reduced mobility. Shower mixer with 30-year warranty.


ADVANTAGES

-  Sequential: opens/closes with cold water
-  Maximum hygiene: no non-return valves
-  SECURITHERM: optimum anti-scalding safety
-  Thermostatic: temperature stability

TECHNICAL CHARACTERISTICS

SECURITHERM sequential thermostatic shower mixer - Ref. 9630

| | |
|---------------------|---|
| Technology | SECURITHERM Securitouch sequential thermostatic shower mixer |
| Length | 184mm |
| Flow rate | 9 lpm at 3 bar |
| Temperature limiter | YES |
| Finish | Chrome-plated brass |
| Norms |        |

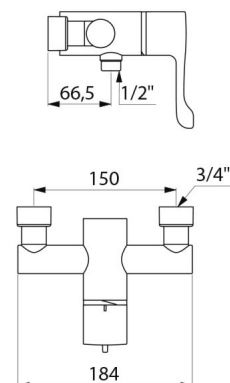

Warranty



Repairability

