

SECURITHERM EP BIOCLIP

pressure-balancing basin mixer

Ref. 2821LEP

Single hole removable mechanical mixer H. 95mm L. 120mm, Hygiene lever

2025 UK public price excluding VAT: £411.29

DESCRIPTION

SECURITHERM EP BIOCLIP pressure-balancing basin mixer - Ref. 2821LEP

Deck-mounted mechanical basin mixer with pressure-balancing. BIOCLIP mechanical mixer: mixer can be removed easily for cleaning and disinfection.

Single hole mixer with spout H. 95mm L. 120mm fitted with a BIOSAFE hygienic flow straightener.

Spout suitable for fitting a BIOFIL point-of-use filter.

Ø 35mm ceramic cartridge with pressure-balancing and pre-set maximum temperature limiter.

Thermal shocks are possible without removing the control lever or shutting off the cold water supply.

Anti-scalding safety: HW flow rate reduced if CW supply fails (and vice versa).

Stable temperature regardless of variations in pressure and flow rate in the system.

Body and spout with smooth interiors and low water volume.

Flow rate limited to 5 lpm at 3 bar.

Hygiene control lever L. 150mm.

Without pop-up waste.

PEX flexibles F3/8" with stopcocks.

Filters and non-return valves.

Fixing reinforced via 2 stainless steel rods.






Mechanical mixer with SECURITHERM pressure-balancing ideal for healthcare facilities, retirement and care homes, hospitals and clinics.

Single hole mixer suitable for people with reduced mobility.

Mixer with 30-year warranty.





TECHNICAL CHARACTERISTICS


SECURITHERM EP BIOCLIP pressure-balancing basin mixer - Ref. 2821LEP

| | |
|---------------------|---|
| Connector | F3/8" |
| Technology | SECURITHERM EP BIOCLIP |
| Drop height | 95mm |
| Spout length | 120mm |
| Flow rate | 5 lpm at 3 bar |
| Temperature limiter | Yes |
| Finish | Chrome-plated brass |
| Norms | ACS      |



ADVANTAGES

-  HW flow rate reduced if CW fails
-  Hygiene: remove for internal descaling
-  Hygiene: smooth interior reduces bacteria
-  EP: reduces temperature variations

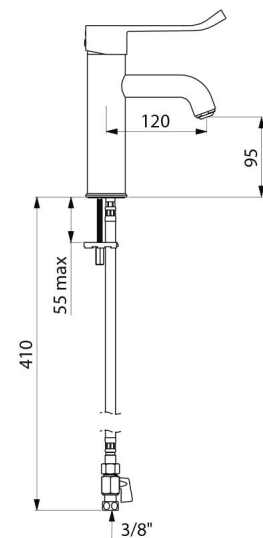

Warranty

30
YEAR
WARRANTY

Repairability

50
YEARS
REPAIRABILITY
